

Kite EMCCD

Digital Monochrome Scientific Interline EMCCD
658 x 496 • Readout Noise <1e • 50Hz Frame Rate •



Key Features and Benefits

-20°C VGA Scientific EMCCD

- **658 x 496 EMCCD sensor**
Enables optimum image resolution in low light imaging applications
- **B/W EMCCD technology**
Enables high sensitivity imaging with 1000x on-chip gain
- **16 bit CameraLink output**
Provides wide dynamic range
- **53% QE from Virtual Phase sensor**
Optimum Photon collection
- **Frame Interline Transfer (FIT)**
No mechanical shutter required, less smear at shorter exposures

Resolution	658 x 496
Readout Noise	<1e
Frame Rate	50Hz
Cameralink	16bit

Specification for Kite EMCCD

Sensor	Texas Instruments TC247SPD
Sensor Type	1/2" Frame Interline Transfer (FIT) Impactron
Active Pixel	658 x 496
Pixel Size	10µm x 10µm
Active Area	6.58mm x 4.96mm
Full Well Capacity	20000 electrons
Shift Register Well Depth	100000 electrons
Non Linearity	< 1%
Readout noise	< 1 electrons with EM gain ON, < 20 electrons with EM gain OFF
Dynamic Range	83dB
Frame Rate	50Hz
Dark Current	< 1e / pix / sec
Digital Output Format	16 bit CameraLink (base configuration)
Peak Quantum Efficiency	53% @ 530nm
Spectral response	350 - 1100nm
Cooling	-20°C with ambient air @ +20°C
Binning	1x1, 2x2, 3x3, 4x4
Antiblooming protection	Yes
Lens Mount	C mount
Synchronisation	Trigger IN and OUT - TTL compatible
Power Supply	12V DC ±10%
Total power consumption	< 12W
Operating case temperature	-20°C to +55°C
Storage Temperature	-30°C to +85°C
Dimensions	97mm x 68mm x 61mm
Weight (no lens)	< 550g

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

Ordering Information

Camera

KITE EM247 digital B/W camera	KI247-CL
KITE Power Supply Cable	RPL-FA-CBL

Optional Accessories

EPIX(R) EB1 base CL card	RPL-EPIX-EB1
EPIX(R) base Notebook CL card	RPL-EPIX-ECB1-34
EPIX(R) base Notebook CL card	RPL-EPIX-ECB1-54
EPIX(R) XCAP STD software	RPL-XCAP-STD
CameraLink Cable, 2m ¹	RPL-CL-CBL-2M
Optical Visible lenses ²	RPL-xx-xxxx


Note 1: Longer CL cable available

Note 2: Please consult us to check our range of lenses

Demo is available on request.
Pricing AOR subject to volumes.

Detailed technical drawings
can be downloaded at
www.raptorphotonics.com

Quantum Efficiency

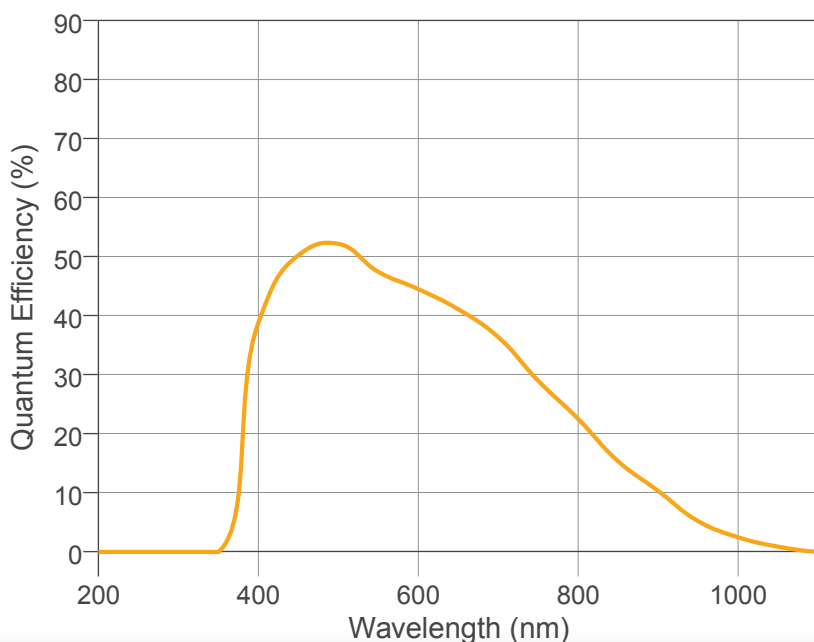

Applications

- Adaptive Optics and Astronomy
- Calcium signaling
- Fluorescence imaging / spectroscopy
- Flow cytometry
- FRET / FRAP / TIRF
- Genome sequencing
- High content screening
- High resolution fluorescence imaging
- Hyperspectral imaging
- LIBS
- Live Cell Imaging
- Single molecule detection
- Solar Cell Inspection
- X-ray tomography

Document #: INKI247-CL 0417R1