


# SpotOn LA

## Large Aperture Beam Positioning System

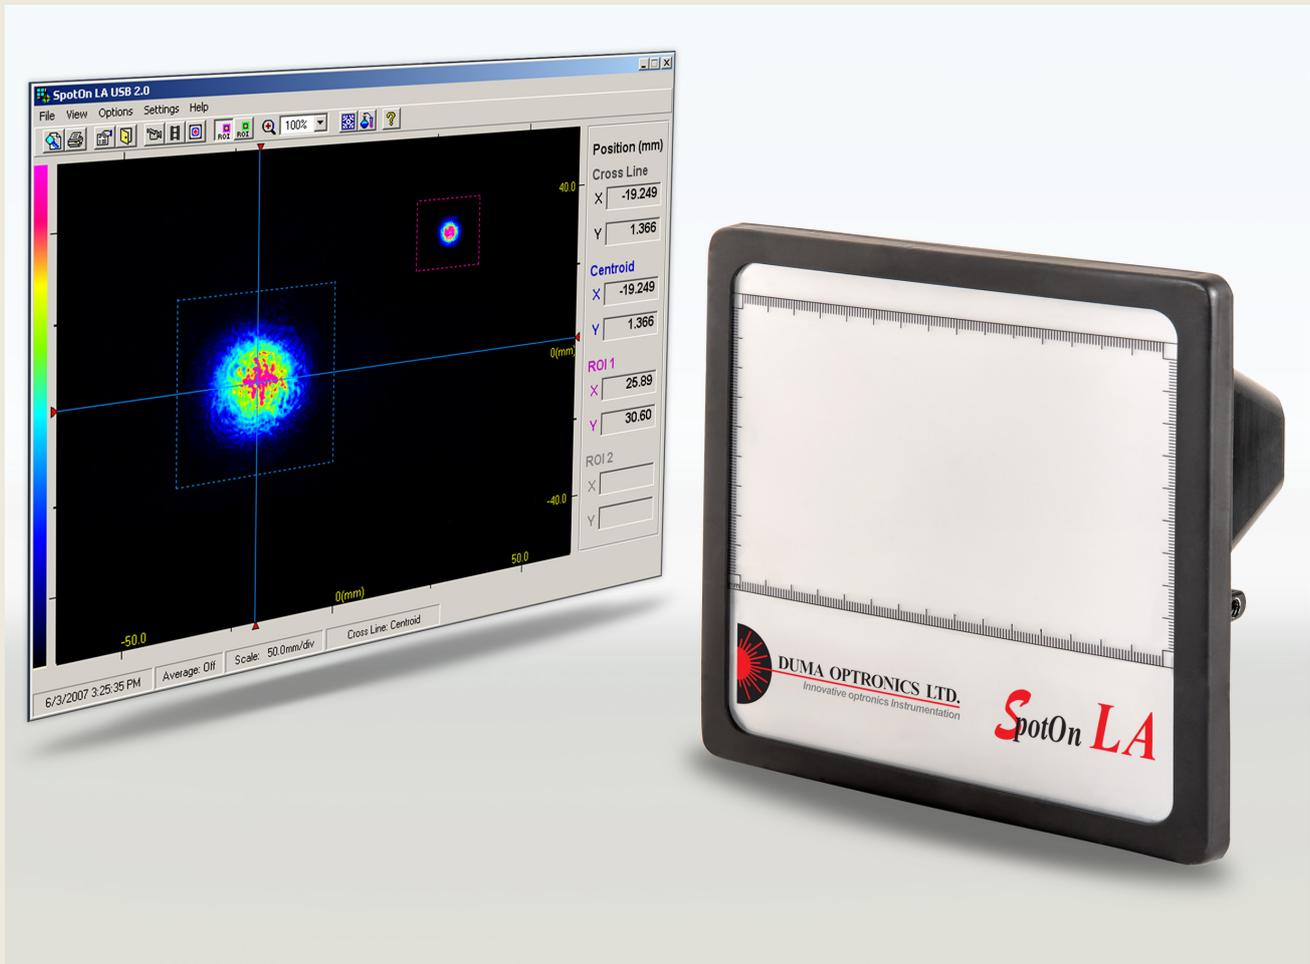

### Featuring Large Optical Aperture

#### Applications

- Measure position deviations over long distances
- Monitoring low frequencies displacements, including buildings and bridges
- Fence polls alignment
- Track straightness

#### Main Features

- **Large Aperture** - For long distance or large movement alignment
- **Extremely accurate** - Less than 1% edge-to-edge and 30  $\mu\text{m}$  resolution for minute movements
- **Versatile** - Measures beam position (up to 3 beams simultaneously), measures both CW and pulsed beams
- **Easy to use** - User friendly software with on-line Help routine, P&P camera with USB2.0 interface



**DUMA OPTRONICS LTD.**


1st Hazait St., P.O.Box 3370 Neshet 3675018, Israel Tel:972-4-8200577 Fax: 972-4-8204190  
Website: <http://www.duma.co.il> E-mail: [sales@duma.co.il](mailto:sales@duma.co.il)



# Specifications

Detection size	X=150mm, Y=90mm
Dimensions	185mm(L) x185mm(H) x91mm(W)
Mechanics	Rugged water resistant Aluminum housing
Mounting	Tripod mount UNC 1/4 - 20
Weight	1350 gr
Frame rate	30 Hz
Spectral response	400 – 800 nm
Position accuracy	Less than 1% Edge-to-edge
Position resolution	30 μm
Interface	High Speed USB2.0
Cable	100 cm USB2.0 cable attached to camera, (2.5m cable extension - optional)
Power	Powered by USB port
Input power level	About 2.5mW at 650nm (consult factory about attenuation)

## Mechanical drawing

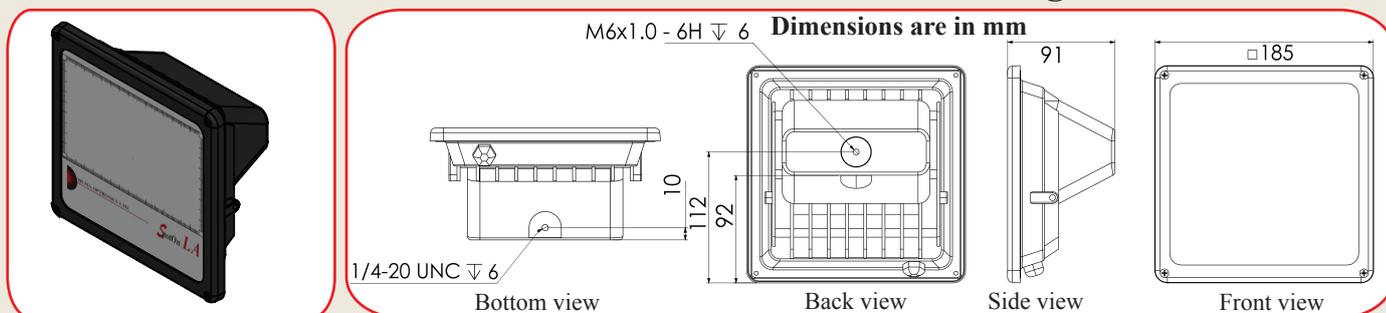

# Software Features

- Centroid calculation and display
- 3 regions of interest for simultaneous measurements of up to 3 beams
- 2D contour map of beam in real time
- Direct data logging to Excel files with detailed statistics
- Data exporting to another computer via RS232
- Average
- Automatic Pass/Fail analysis report
- ActiveX package to control software from your application



# Hardware Requirements

The recommended host computer requirements are:  
 Intel Core 2 Quad 2.83 GHz, Windows XP/7/8/10, 1 G DDR2, 1GB disk space,  
 1 free high speed USB2.0 port, CD ROM drive



# Ordering Information

SPOTON-LA – System comprises of a Plug & Play camera with USB2.0 interface and attached cable, software on CD disk.



## DUMA OPTRONICS LTD.

1st Hazait St., P.O.Box 3370 Neshet 3675018, Israel Tel:972-4-8200577 Fax: 972-4-8204190  
 Website: <http://www.duma.co.il> E-mail: [sales@duma.co.il](mailto:sales@duma.co.il)